
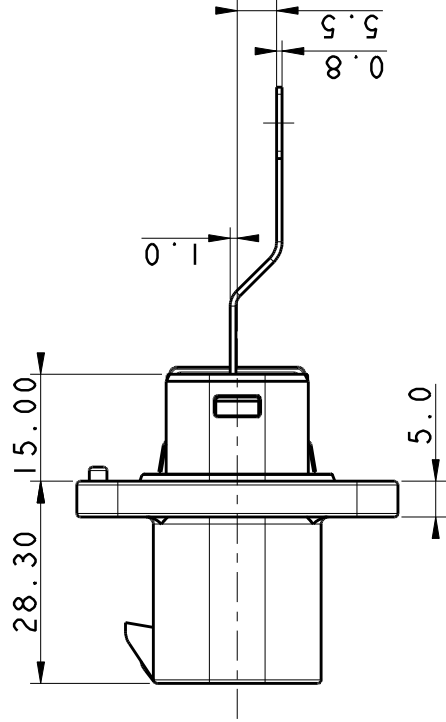
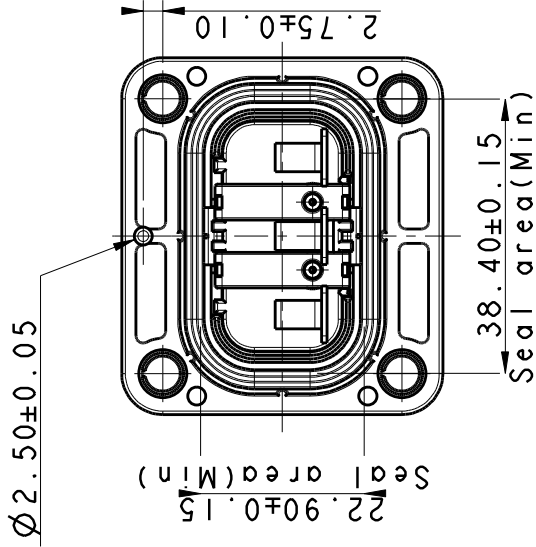
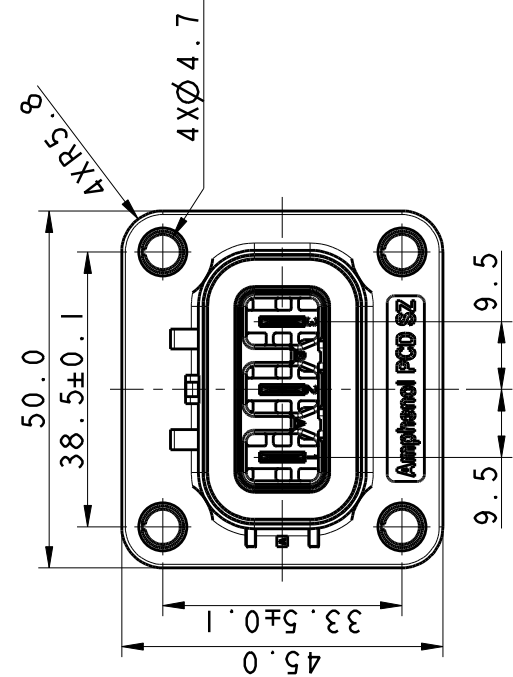



C-HVSLW633023XX

REV	ECN	DESCRIPTION	DATE	MODIFIED
1		PRE-RELEASE	Jan-02-18	
2	R3443N	CHANGE CURRENTS AND UPDATE FORMAT	Jun-25-19	

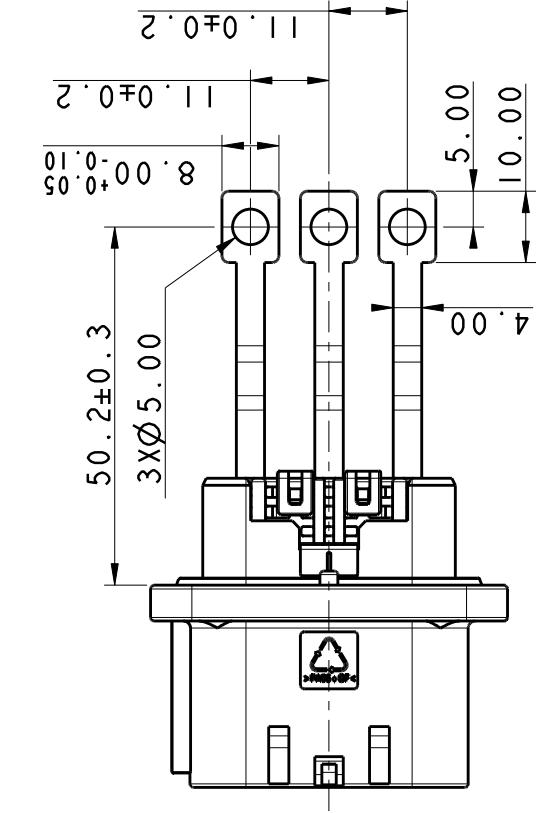

TECHNICAL DATA		SPECIAL CHARACTERISTICS SYMBOL
CURRENT RATING	POWER CONTACT 32A/2	✦
	SIGNAL CONTACT 3A(0.35~0.5mm ²) WIRE OD: 1.4~2.4mm	
VOLTAGE RATING	800V DC	✦
OPERATING TEMPERATURE	-40~+125°C	
DIELECTRIC WITHSTANDING VOLTAGE	3000V AC	✦
INSULATION RESISTANCE	100MΩ	✦
DURABILITY	50 CYCLES	◎
SHIELDING	YES	
WATERPROOF (ASSEMBLE CONDITION)	IP67 IP6K9K	✦
APPLICATION: POLLUTION DEGREE II OVERVOLTAGE CATEGORY II INHOMOGENEOUS FIELD ALTITUDE NO MORE THAN 2000M		

PART NUMBERING SCHEME

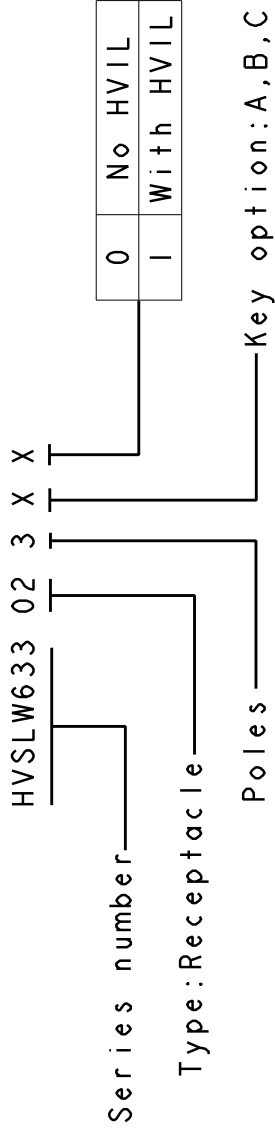

✦: IS CRITICAL CHARACTERISTIC SYMBOL, ◎: IS IMPORTANT CHARACTERISTIC SYMBOL.

DIMENSIONS		TOLERANCES	PROJECTION	TITLE	
ANSI Y14.5M	.X	±0.3		ENG	HVSLW633 RECEPTACLE
UNITS: MM	.XX	±0.20			
PRO/E FILE	ANGLES	±2.0°			
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN			CHKD	SIZE
				APPD	DWG NO.
					REV

A3 C-HVSLW633023XX

CODE: 58982 SCALE: SHEET 1 OF 3

C-HVSLW633023XX

C-HVSLW633023XX