


Panel Cut Out

*Notes / 技术参数:

Material 材料\ Finish 表面处理
Shells&Coupling 外壳 : Aluminum alloy 铝合金
/ Olive drab zinc plated 镀绿锌
Ring 卡环: Aluminum alloy 铝合金
Insert 插芯: Thermoplastics EN45545 热塑料
Contact 插针: 12x #12 Pin contacts (需单独购买)
Copper alloy 铜合金
Silver plated, crimp type 镀银, 压接形式

Mechanical data 机械参数
Operating Temperature 温度范围: -55°C ~ +125°C
Durability 机械寿命: 500 cycles
Salt Spray 盐雾: 96H

Electrical data 电气参数:
Rated Voltage 额定电压 : 900V(AC)
Rated Current 额定电流 : 23A Max(#12 contacts)
Withstanding Voltage 耐受电压: 2800VAC
Insulation Resistance: 5000 MΩ Min
Contact Resistance: Less than 1.3miliohms(#12 contacts)

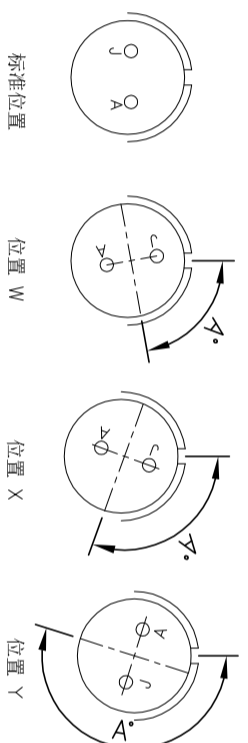

ASVG02A2851PCGZLC	-	标准位置
ASVG02A2851PCYGZLC	Y	190°
ASVG02A2851PCXGZLC	X	135°
ASVG02A2851PCWGZLC	W	80°
P/N	Direction	Revolution Angle

DIMENSIONS	ANSI Y14.5M	TOLERANCES	X	± 0.5	PROJECTION	Amphenol Pcd Shenzhen	TITLE	SIZE	DWG NO.	REV	
	UNITS: MM		.XX	±0.3				CHKD	A3		ASVG02A2851PCXXGZLC
	CAD FILE	ANGLES	ANGLES	±0.5°				ENGR	SCALE	SHEET	
								APPD	1:1	1 OF 1	
	ORIGINAL NOT FOR CUSTOMER DISTRIBUTION	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN									

连接器插座 28-51P
12-#12